



REQUEST FOR QUOTATION

(For Infrastructure Projects)

Company Name/TIN: _____
 Business Address: _____

Date: July 26, 2024
 PR No: 2024-07-0419

Please quote your lowest price on the item/s listed below, subject to the terms and conditions stipulated, and submit your quotation duly signed by your representative not later than **July 29, 2024; 05:00 P.M** in the return envelope to the BAC Secretariat, DSSC, Matti, Digos City, or email to psu@dssc.edu.ph.

TERMS AND CONDITIONS:	
1.	Completion of Works: 45 calendar days from receipt of Purchase Order.
2.	Price validity: 120 calendar days
3.	Documentary requirements: PhilGEPS Reg. Number, Mayor's Permit, PCAB License, SEC/DTI Cert., BIR Cert. of Reg., Bill of Quantities, Omnibus Sworn Statement, & Income/Business Tax Return (For ABCs above P500K)
4.	The Approved Budget for the Contract for this procurement is, Php 235,517.67


RACHEL R. YONTING
 Procurement Service Unit Head/BAC Secretariat

Item No.	Qty.	Unit	Item Description	ABC per Item	Unit Cost	Total Cost
1	1	Lot	REPAIR AND REPAINTING OF COMFORT ROOMS	235,517.67		
			(Five Classrooms Educational Building)			
			SCOPE:			
			1. Other General Requirements			
			2. Scaffolding Works			
			3. Finishing Works			
			4. Painting Works			
			5. Electrical Works			
			6. Plumbing Works			
GRAND TOTAL:						

Completion of Works: _____
 Price Validity : _____

After having carefully read and accepted your General Conditions, I/We quote you on the item/s at prices noted above. If the space for delivery period, warranty, and price validity are left blank, it means that I/ We concur with the terms and conditions specified by the Davao del Sur State College (DSSC).

 Canvasser

Printed Name and Signature
 Contact Details:
 Landline: _____
 Mobile No. _____
 E-mail address: _____
 Date signed: _____



Name of the Project: **REPAIR AND REPAINTING OF COMFORT ROOM**
Location: **Five Class Room Educational Building, DSSC – Digos Campus, Matti, Digos City**
Scope of Work: **As per Item Number**

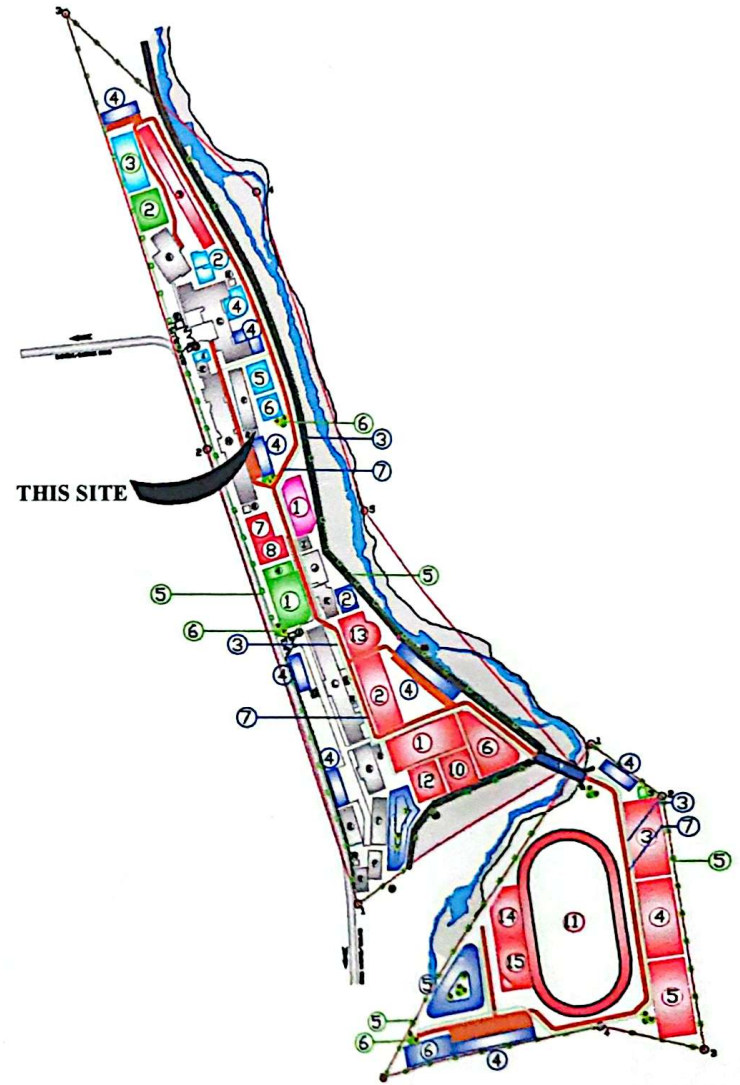
BILL OF QUANTITIES

ITEM NO.	ITEM DESCRIPTION	QUANTITY	UNIT	UNIT COST	AMOUNT
1	TILE WORKS	59.76	sq.m.		
3	CARPENTRY WORKS	1.00	lot		
4	PLUMBING WORKS	1.00	lot		
4	ELECTRICAL WORKS	1.00	lot		
5	PAINTING WORKS				
	MASONRY	63.73	sq.m.		
	WOOD	28.12	sq.m.		
	STEEL	36.84	sq.m.		
				GRAND TOTAL	-






Prepared by:



PERSPECTIVE



LOCATION MAP

SCHOOL LOGO	PROJECT TITLE	PREPARED BY	CHECKED AND REVIEWED BY	RECOMMENDING APPROVAL	APPROVED BY	SHEET CONTENTS	SHEET NO.
	REPAIR AND RE-PAINTING OF COMFORT ROOM LOCATION: 5-CLASSROOM EDUCATIONAL BUILDING, DSSC CAMPUS, BRGY. MATTI, Digos CITY, DAVAO DEL SUR	 ENGR. VON L. DEL ROSARIO PLANNING STAFF	 ENGR. BORANDREY L. ARMAMENTO PGD I	 ENGR. CLARA A. ACEBES PHUME - DIRECTOR	 AUGIE FUENTES, PhD DSSC - PRESIDENT	AS INDICATED	

Name of Project: **REPAIR AND REPAINTING OF COMFORT ROOM**

Location: **Five Class Room Educational Building, DSSC – Digos Campus, Matti, Digos City**

SCOPE OF WORK

OTHER GENERAL REQUIREMENT

- Site clearing and preparation.
- Mobilization/Demobilization.
- Install temporary fencing/cordon/barrier.

CONSTRUCTION SAFETY AND HEALTH

- Ensure compliance with DOLE criteria for construction safety and health.
- Ensure that all workers to always wear PPEs. (Safety helmets, shoes, gloves, vest, and harness)

SCAFFOLDING WORKS

- Install scaffoldings for ceiling repair and painting works.

FINISHING WORKS

- Repair of roof frame and gemilina ceiling
- Install 5mm thk. Fiber cement board for exterior ceiling.
- Install 60x60cm glazed tiles for wall (1.5 height from finished floor line) and 60x60cm unglazed tiles for flooring.
- Use Tile Adhesive as binder.
- Use Tile Grout (same color of tiles) for sealing of all connections/joints.

PAINTING WORKS

Masonry

- Scraping and cleaning of surfaces to be paint.
- Apply waterproofing paint for interior and exterior surfaces including ceiling.
- Apply body filler (skim coat) for holes, uneven surfaces and hair line cracks.
- Apply concrete primer paint
- Apply two coats semi-gloss latex paint color white for interior and color cream for exterior concrete surfaces.

Wooden (door)

- Cleaning of surfaces to be paint.
- Apply body filler (polituff polyester) for holes and joints.
- Apply two coats semi-gloss quick dry enamel paint.



Steel and Roof

- Scraping and cleaning of surfaces to be paint.
- Apply metal primer of all metal surfaces
- Apply two coats Automotive enamel Paint.

ELECTRICAL WORKS

- Replacement basted lightings and defective switches.


PLUMBING WORKS

- Replacement of broken wall mounted urinal, defective water closet and defective faucet and fittings.

Prepared by:


Engr. Von L. Del Rosario
PDO STAFF

Checked/ Reviewed by:


Engr. Bon Andrey L. Armamento
PDO II

Recommending Approval by:


Engr. Clara A. Acebes
PPDME DIRECTOR

Approved by:


Augie E. Fuentes, PhD.
COLLEGE PRESIDENT



Ms. Charmie Marie P. Dela Cruz
GENERAL SERVICES UNIT HEAD



0822939136



president@dssc.edu.ph



www