



REQUEST FOR QUOTATION

(For Infrastructure Projects)

Company Name/TIN: _____
 Business Address: _____

Date: November 5, 2024
 PR No: 2024-10-0761

Please quote your lowest price on the item/s listed below, subject to the terms and conditions stipulated, and submit your quotation duly signed by your representative not later than **November 8, 2024; 05:00 P.M.** in the return envelope to the BAC Secretariat, DSSC, Matti, Digos City, or email to psu@dssc.edu.ph.

TERMS AND CONDITIONS:

1. **Completion of Works:** 140 calendar days from receipt of Purchase Order.
2. **Price validity:** 120 calendar days
3. **Documentary requirements:**
 PhilGEPS Reg. Number, Mayor's Permit, PCAB License, SEC/DTI Cert., BIR Cert. of Reg., Bill of Quantities, Detailed Estimates, Omnibus Sworn Statement, & Income/Business Tax Return (For ABCs above P500K)
4. The Approved Budget for the Contract for this procurement is, **Php 700,000.00**


RACHEL R. YONTING

Procurement Service Unit Head/BAC Secretariat

Item No.	Qty.	Unit	Item Description	ABC per Item	Unit Cost	Total Cost
1	Lot	1	Rehabilitation of Gen.Ed. Building Ground Floor Comfort Rooms	700,000.00		
GRAND TOTAL:						

Completion of Works: _____
 Price Validity : _____

After having carefully read and accepted your General Conditions, I/We quote you on the item/s at prices noted above. If the space for delivery period, warranty, and price validity are left blank, it means that I/ We concur with the terms and conditions specified by the Davao del Sur State College (DSSC).

Canvasser

Printed Name and Signature

Contact Details:

Landline: _____

Mobile No. _____

E-mail address: _____

Date signed: _____



ISSUE STATUS	REV. NO.	EFFECTIVE DATE	PAGE NO.
01	00	09.01.2022	1 of 1



Name of the Project: **REHABILITATION OF GENED BUILDING GROUND FLOOR**
 Location: **GEN ED BUILDING, DAVAO DEL SUR STATE COLLEGE CAMPUS, MATTI, DIGOS CITY**
 Scope of Work: **As per Item Number**

PROJECT DURATION : 140 CALENDAR DAYS

BILL OF QUANTITIES

ITEM NO.	ITEM DESCRIPTION	QUANTITY	UNIT	UNIT COST	AMOUNT
A.1	OCCUPATIONAL SAFETY AND HEALTH PROGRAM	1.00	lot		
A.2	MOBILIZATION / DEMOBILIZATION	1.00	lot		
A.3	MASONRY WORKS	10.88	sq.m.		
A.4	TILEWORKS	172.80	sq.m.		
A.5	CEILING WORKS	46.08	sq.m.		
A.6	DOORS & WINDOWS	9.00	units		
A.7	CABINETS	5.76	sq.m.		
A.8	ELECTRICAL WORKS	14.00	units		
A.9	PLUMBING WORKS	1.00	lot		
A.10	CARPENTRY WORKS	1.00	lot		
A.11	PAINTING WORKS	100.00	sq.m.		
A.12	EQUIPMENT RENTAL AND TEMPACIL	1.00	lot		
				GRAND TOTAL	-

M.



Name of Project: **REHABILITATION OF GENED BUILDING GROUND FLOOR COMFORT ROOMS**

Location: **DSSC – Digos Campus, Matti, Digos City**

SCOPE OF WORK

OTHER GENERAL REQUIREMENT

- Site clearing and preparation.
- Mobilization/Demobilization.
- Install temporary fencing/cordon/barrier.
- Install temporary facilities. **(As to location refer to the DSSC Site Engineer)**

CONSTRUCTION SAFETY AND HEALTH

- Ensure compliance with DOLE criteria for construction safety and health.
- Ensure that all workers to always wear PPEs. (Safety helmets, shoes, gloves, vest, and harness)

MASONRY WORKS

- Cutting and bending deformed bars for concrete hollow blocks.
- Laying of concrete hollow blocks (600psi) for walls and septic vault.
- Cement Plastering works.

FABRICATED MATERIALS AND HARDWARE

- Install awning type windows (reflective glass) on powder coated aluminum frames.
- Install compact phenolic board partition and panel doors with other fittings.
- Install compact phenolic board for cabinet with hinges and knob.

FINISHING WORKS

- Install scaffolding for ceiling works.
- Install metal ceiling framings e.g., wall angle, double metal furring (600mm spacing both sides), carrying channel.
- Install 5mm thk. marine plywood for ceiling.
- Plaster all concrete hollow blocks uniformly and without bumps. As to size refer to the plan.
- Install 60x60cm glazed Tile for floor and walls. **(Refer to Plan)**
- Use Tile Adhesive as binder.
- Use Tile Grout (same color of tiles) for sealing of all connections/joints.



DOCUMENT CODE NUMBER			
FM-DSSC-PRO-006			
ISSUE STATUS	REV. NO.	EFFECTIVE DATE	PAGE NO.
01	00	09.01.2022	1 of 1



PLUMBING WORKS

- Install sanitary pipelines.
- Install water pipelines system.
- Install water closet, urinals, lavatory and other fittings.


PAINTING WORKS

- Apply cast to hide surface imperfections and hair line cracks minimum of three (3) coats.
- Apply flat enamel paint for wooden surfaces.
- Apply 2 coats semi-gloss quick dry enamel paint for wooden surfaces
- Apply 2 coats semi-gloss latex paint for concrete surfaces.


ELECTRICAL WORKS

- Install all electrical roughing-in and wirings. **(Refer to Electrical Plan)**
- Install all lightings, switches, convenience outlets and panel boards with circuit breakers. **(Refer to Electrical Plan)**

Prepared by:


Engr. Von L. Del Rosario
 PDO STAFF


Checked/ Reviewed by:


Engr. Bon Andrey L. Armamento
 PDO II

Checked/ Reviewed by:


Engr. Clara A. Acebes
 PPDME DIRECTOR

Approved by:


Augie E. Fuentes, PhD.
 COLLEGE PRESIDENT







1
A:1
SCALE
 INTERIOR VIEW - MALE CR



2
A:1
SCALE
 INTERIOR VIEW - FEMALE CR



PROJECT TITLE	REHABILITATION OF GENED BUILDING GROUND FLOOR COMFORT ROOMS
LOCATION	DAVAO DEL SUR STATE COLLEGE CAMPUS, BRGY. MATTI, DIGOS CITY DAVAO DEL SUR
PREPARED BY	 ENGR. VON DEL ROSARIO PMP-1504
CHECKED AND REVIEWED BY	 ENGR. BON LAWRENCE L. AMAMOTO PMP-1504
APPROVED BY	 ENGR. CLARA A. ACEBES PMP-1504
RECOMMENDED APPROVAL	 ALICE D. DIGOS, PHD ACTING PRINCIPAL
SHEET NO.	1/1

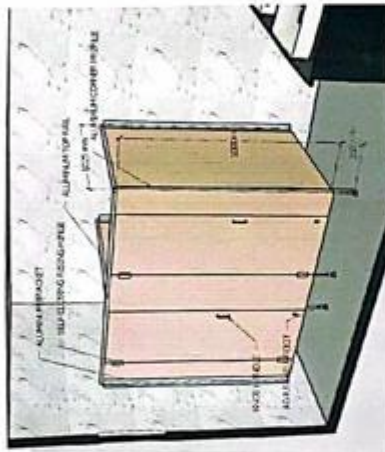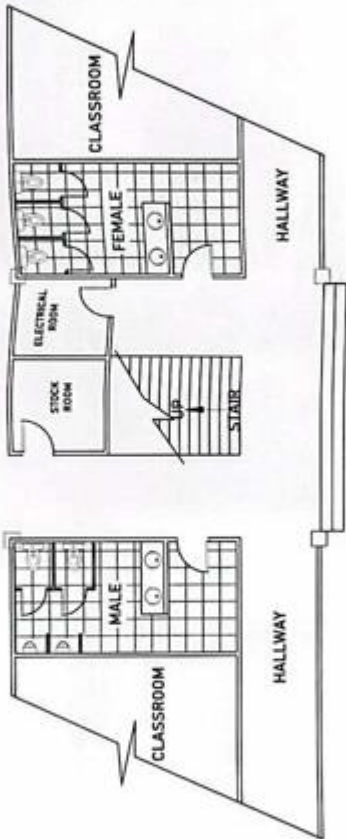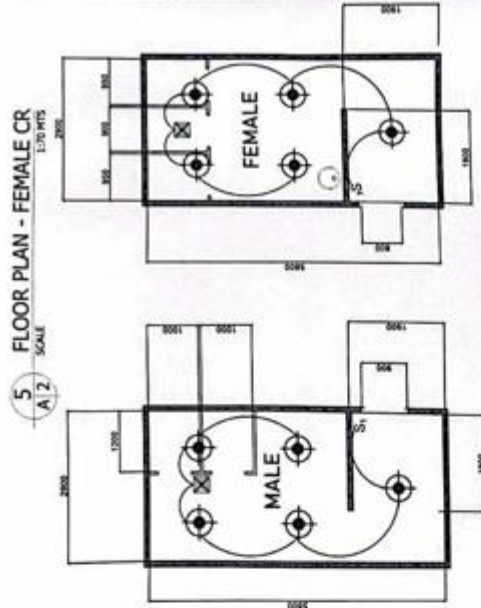

LEGEND:
 S1 10 WHITE RECESSED PNLGHT (8" DIA)
 SINGLE GANG SWITCH
 CEILING MOUNTED EXHAUST FAN

PROJECT TITLE	REHABILITATION OF GENMED BUILDING GROUND FLOOR COMFORT ROOMS LOCATION: DAVAO DEL SUR STATE COLLEGE CAMPUS, BRGY. MATTI, DIGOS CITY, DAVAO DEL SUR
PREPARED BY	ENGR. VON L. DEL ROSARIO 420-7417
CHECKED AND REVIEW BY	ENGR. IRON L. ARMAENTO 1001
RECOMMENDING APPROVAL	ENGR. DINA A. ACERES PHYSICIAN
APPROVED BY	ALDO P. PUNTES, PND. SCHOOL PRINCIPAL
SHEET NO.	A 1/2